



**LoneStar Fiberglass Pools**


15655 East US Hwy 90  
Kingsbury, Texas 78638

866-471-6900

830-875-6900

WWW.LONESTARFIBERGLASSPOOLS.COM

Approx. Gallons of Water: 15,000  
Approx. Weight: 3,800 lbs.

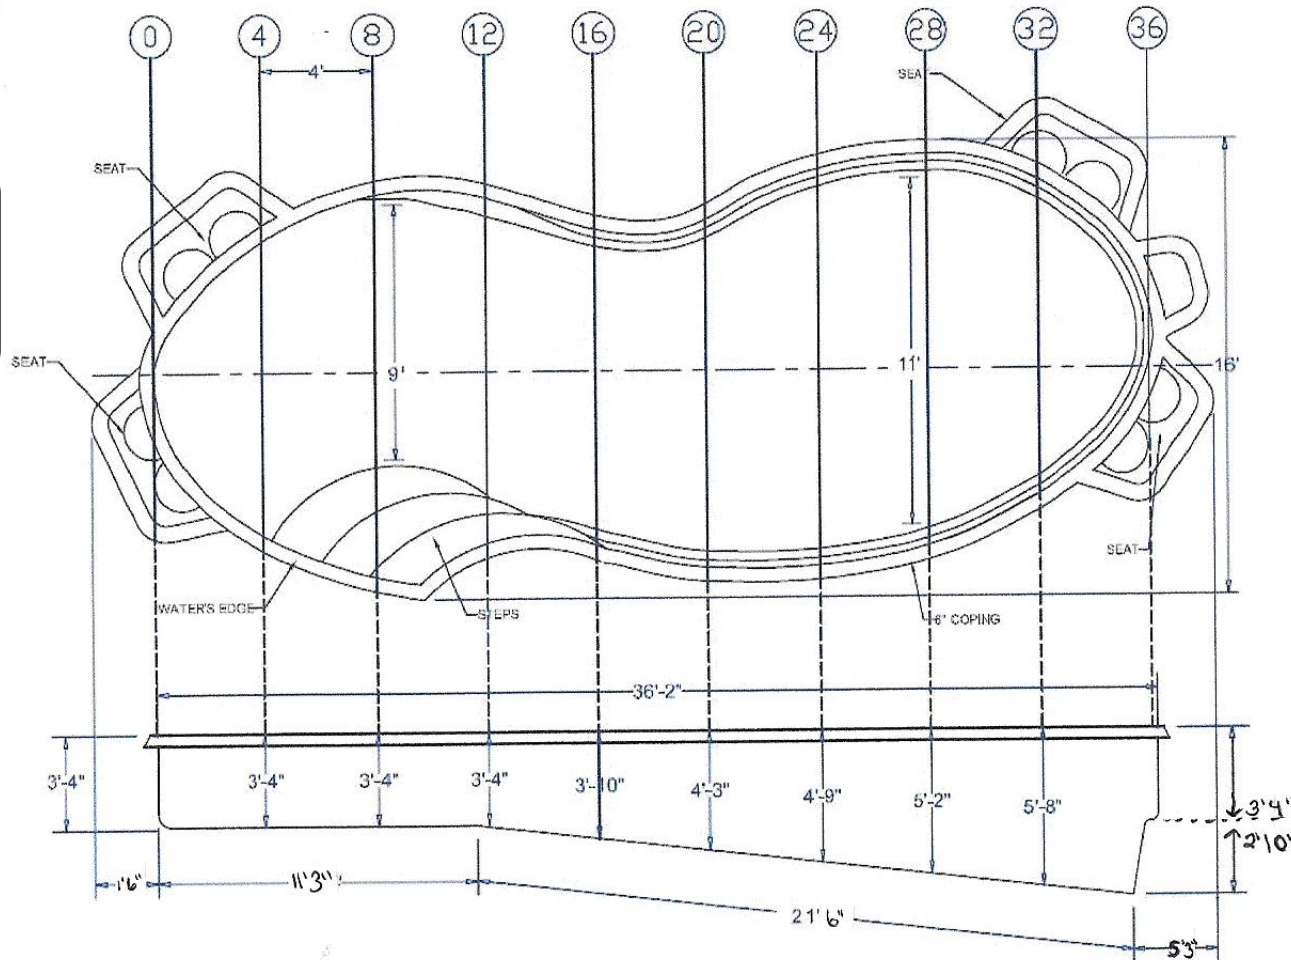

It is important to have your excavator call to review the Dig Diagram prior to excavation. All dimensions are Approximate. A 3" over dig must be added to the bottom for the stone, along with a 2' by 3' trench from the pool hole to the area of the equipment placement for plumbing and wiring.

**THE CHARLESTON MODEL – 16' X 37'-6"**

**LONESTAR FIBERGLASS POOLS**